


SPRAY COAT SYSTEM SYSTEM INSTALLATION GUIDE AND PRODUCT DATA

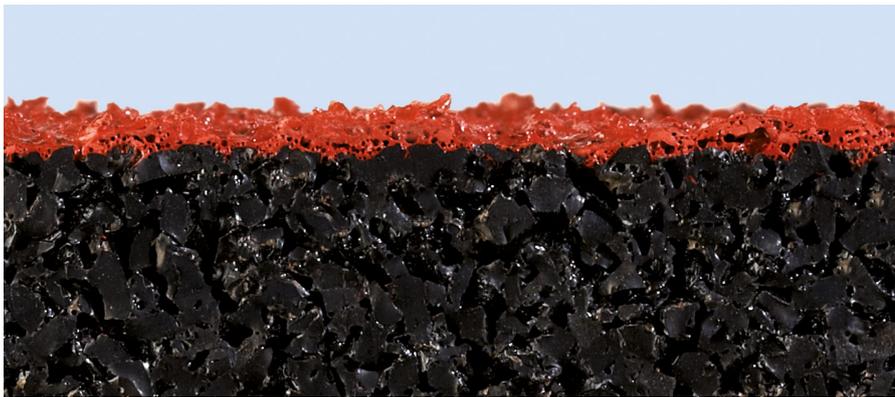

POLYTRAK Spray coat system provides a highly cost effective solution.

This system utilises a structural spray comprising polyurethane compound and fine EPDM granules, applied to a cast in place base of rubber crumb and clear polyurethane binder. This system provides an economical solution for institutional, recreational and field training facilities, with a textured final surface.

Spreading rates

The following table of spreading rates provides an accurate guide to optimum usage on a perfectly flat substrate. Any undulation or voids may result in additional usage and an allowance must be made for on-site waste or spills. The contractor must ensure that adequate volumes of material are on hand at the time of installation.

| POLYTRAK STRUCTURED SPRAY SYSTEM SPREADING RATES | | | | |
|---|--------------------|-------------|------------------------|---------------------------------|
| Base | POLYTECH Binder | 20% | 1.28 kg/m ² | |
| 10 mm | Black SBR 1–4mm | | 6.40 kg/m ² | Mix binder and SBR thoroughly |
| Top | SC1 System | Ratio 60:40 | 1.20 kg/m ² | Top Coat rates are for 2 passes |
| 3 mm | Red EPDM 0.5–1.5mm | | 0.80 kg/m ² | Use suitable spray equipment |

Installation

Installation of the Structured spray system involves a rubber base mat, cast in place. The material can be applied by hand using rollers or with mechanical assistance using a paving machine.

The wearing course comprises a sprayable polyurethane compound, blended with fine EPDM granules. The material is applied using a proprietary spraying machine, such as the one illustrated.

SPRAY COAT SYSTEM MAINTENANCE OF THE WEARING SURFACE

POLYTRAK synthetic sports surfaces are produced using high quality rubber, polyurethane and EPDM products that are extremely resistant to normal wear and tear. It is good practice to regularly clean the surface as dirt does increase wear and tear and consequently can shorten the life span of the wearing surface.



CLEANING:

The surface should be washed down periodically with a high-pressure water hose. Depending on the degree of dirt a light detergent in a low concentration can be added. The surface may also be vacuumed and brushed with synthetic brushes if necessary. Heavy dirt spots can be taken off by a damp rag that has been soaked wear coat in that case and should be done under strict supervision.

PREVENTION:

To prevent excessive wear on the inner lanes on a running track, we suggest periodically blocking off different lanes for training purposes. This will ensure that the inner lanes do not wear out first and increase the total life span of the wearing surface.

MAINTENANCE:

Keep the surface free from dust, dirt and pollution, which come from outside and around the running track depending on the layout of the surrounding area and how it is maintained. For cleaning use a water spraying machine with roll brushes similar to road cleaning machines for industrial parking areas. After preparing the surface with clean water the roll brushing machine should vacuum the dust, dirt and water, keeping the surface free and clean.

The frequency of cleaning will depend upon the level of pollution and outside influences, do not allow the dust to become hard and engrained. The line markings are made out of high quality 2-part-polyurethane lining paints. Depending on use these may require repainting after three to five years.

TECHNICAL DATA

Structural spray coat & SBR base
POROUS SURFACE

| | |
|----------------------|----------|
| Force reduction | 40 % |
| Vertical deformation | 2.2 mm |
| Friction | 63 TRRL |
| Tensile strength | 0.64 MPa |
| Elongation at break | 60 % |



Cert No.1819
ISO 9001. 2008
ISO 14001. 2004

